


WHISPERPRO®

SINGLE SPEED PUMPS

The First-in-class hydraulic performances, modern design for the highest efficiency at low speed with very low energy consumption.

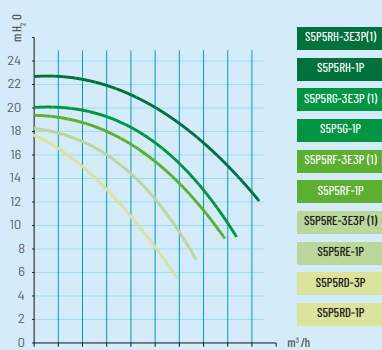

FEATURES

- ¼ turn opening lid
- Quick self priming
- One-piece pump body


BENEFITS

- Easy opening and locking
- Quick and safe start of the pump
- Super silent

TECHNICAL FEATURES

- 100% Made by Pentair in our Pisa, Italy plant
- Induction asynchronous motor
- Bi-material shaft with Stainless Steel AISI 316 drive-end
- SKF high temperature sealed bearings
- Thermal Protection (single phase) IE3 compliant (tri-phase)
- IP-X5
- Inlet/Outlet → 2" BSP tapped
- Ø Unions → 50 mm or 63 mm
- Unions included → Yes
- Salt resistancy → 0.40%

Part Number	Flow m³/h @ 8 m	Power output (kW)	(HP)	Volt (V)	Phase	Length (A) (mm)	Weight (Kg)
S5P5RD-1P	14.3	0.55	0.75	220-240	1~	562	14.3
S5P5RD-3P	12.6	0.55	0.75	380-420	3~	567	12.6
S5P5RE-1P	13.7	0.75	1	220-240	1~	572	13.7
S5P5RE-3E3P	14.3	0.75	1	380-420	3~	602	14.3
S5P5RF-1P	15.3	1.1	1.5	220-240	1~	572	15.3
S5P5RF-3E3P	22.3	1.1	1.5	380-420	3~	602	22.3
S5P5G-1P	16.8	1.5	2	220-240	1~	607	16.8
S5P5RG-3E3P	23.9	1.5	2	380-420	3~	642	23.9
S5P5RH-1P	25	2.2	3	220-240	1~	632	25
S5P5RH-3E3P	30.3	2.2	3	380-420	3~	647	30.3

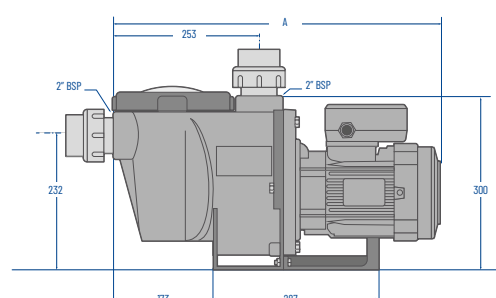

Packaging	Length (mm)	Width (mm)	Height (mm)	Pce/Palet
Box	64	32	36	-
Palet	120	100	150	18